


Poly Flex Damper Drive Plates

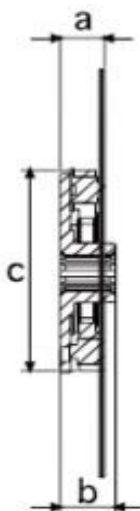

C	B	A	Spline Type
130.5	32.5	25.5	1
172.5	37.5	30.5	1
130.5	32.5	25.5	2
172.5	37.5	30.5	2
172.5	37.5	30.5	3
172.5	37.5	30.5	4

Spline Type

1	10 Teeth - 10 x 23 x 29
2	26 Teeth - 20 / 40 Dp
3	18 Teeth - 12 / 24 Dp
4	10 Teeth - SAE 1"

Hole Dimensions (mm)

5 x 6.35 on 142	6 x 8.8 on 170.2	8 x 6.5 on 165 6 x 9 on 182.4 6 x 8.6 on 200 6 x 10.5 on 200.5	5 x 9.5 on 142 5 x 12.5 on 142 8 x 8.5 on 222.2	6 x 8.5 on 210 6 x 8.5 on 215 8 x 8.5 on 222.2 6 x 9 on 240 8 x 9.5 on 241.3 6 x 8.5 on 250	6 x 8.5 on 250 6 x 8.5 on 269.9 6 x 8.5 on 273 6 x 8.5 on 276.3
-----------------	------------------	---	---	--	--

Outside Diameters (mm)

155.45	189.95	215.9	241.3	263.5	298.4
SAE 6.125	189.95	SAE 6.5	SAE 7.5	SAE 8	298.4
Plate 1	Plate 2	Plate 3	Plate 4	Plate 5	Plate 6
X	X	X	X	X	X
			X	X	X
X	X	X	X	X	X
			X	X	X
			X	X	X
			X	X	X

X - Available

Element Details

Green (80) Light Duty

Red (90) Standard Duty

Blue (95) Heavy Duty



26-28 Tubbs Street, Clontarf QUEENSLAND 4019
PO Box 3153, Clontarf QUEENSLAND 4019
Ph: +61 7 3284 2799 | Fax: +61 7 3284 2672

ADVANCED POLYMER TECHNOLOGY FOR VIBRATION CONTROL

Email: jason@polyflex.com.au Web: www.polyflex.com.au


The Damper Plates are applied to the flywheel surface for the purpose of transmitting power from the engine through the marine gear to the propeller.

It transmits the power, reduces gear noise, dampens vibration and shocks, ensures smooth operation at idle and above rev range.

Designed so that the damper pad can be replaced if needed and also supplied in a range of flexible hardness to support your requirements.

Non-standard items are available for special installations on request. All Steel components are SA5 cobalt zinc coated to inhibit rust for extended life.

Poly Flex Damper Drive Plates

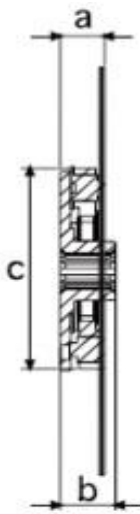

C	B	A	Spline Type
130.5	32.5	25.5	1
172.5	37.5	30.5	1
130.5	32.5	25.5	2
172.5	37.5	30.5	2
172.5	37.5	30.5	3
172.5	37.5	30.5	4

Spline Type

1	10 Teeth - 10 x 23 x 29
2	26 Teeth - 20 / 40 Dp
3	18 Teeth - 12 / 24 Dp
4	10 Teeth - SAE 1"

Hole Dimensions (mm)

6 x 8.5 on 250	3 x 8.8 on 263	6 x 8.8 on 263	6 x 8.5 on 263.5		
6 x 8.5 on 269.9	3 x 8.8 on 269.9	6 x 8.8 on 269.9	6 x 8.5 on 269.9		
6 x 8.5 on 273	3 x 8.8 on 276.3	6 x 8.8 on 276.3	6 x 8.5 on 273		
8 x 11 on 296	3 x 8.8 on 289	6 x 8.8 on 289	6 x 8.5 on 314.3		
	3 x 10.4 on 295.3	6 x 10.4 on 295.3	8 x 11 on 333.4		
	3 x 8.8 on 314.4	6 x 8.8 on 314.4	12 x 8.5 on 334		
	3 x 10.4 on 320.7	6 x 10.4 on 320.7			

Outside Diameters (mm)

314.3	336.5	336.5	352.4		
SAE 10	SAE 9.83 TRI	SAE 9.83	SAE 11.5		
Plate 7	Plate 8	Plate 9	Plate 10	Plate 11	Plate 12
	X	X			
X			X		
	X	X			
X			X		
X			X		

X - Available

Element Details

Green (80) Light Duty
Red (90) Standard Duty
Blue (95) Heavy Duty



26-28 Tubbs Street, Clontarf QUEENSLAND 4019
 PO Box 3153, Clontarf QUEENSLAND 4019
 PH: +61 7 3284 2799 | FAX: +61 7 3284 2672
 ADVANCED POLYMER TECHNOLOGY FOR VIBRATION CONTROL

Email: jason@polyflex.com.au Web: www.polyflex.com.au

The Damper Plates are applied to the flywheel surface for the purpose of transmitting power from the engine through the marine gear to the propeller. It transmits the power, reduces gear noise, dampens vibration and shocks, ensures smooth operation at idle and above rev range. Designed so that the damper pad can be replaced if needed and also supplied in a range of flexible hardness to support your requirements. Non-standard items are available for special installations on request. All Steel components are SA5 cobalt zinc coated to inhibit rust for extended life.